



Dyeing Properties 特性

Characteristics		Evaluation
Reactivity 反應性		II
Substantivity 親和性		A
Migration 移染性		2
Washing off 洗淨性		3
Solubility g/l 溶解度	50°C Water	100
	50°C Water+50 g/l Salt	100
High temp. Dyeing 高溫染色性	Dyed fabric 色布	2-3
	Dye Liquor 染浴	4-5
Color constancy 色恆性	Tungsten Lamp	R
	TL 84 Lamp	R
Metallic ions 金屬離子	Fe ⁺⁺ 鐵	4-5G (Y)
	Cu ⁺⁺ 銅	4-5G (Y)
Resin finishing 樹脂加工	Melamine 三聚氰胺	4-5
	Glyoxal 乙二醛	5
Shade change after fixing treatment 固色後變色性	Polyamide 聚乙醯胺	5
	Quaternary ammonium salt 四級胺鹽	4-5
Stripping 脫色性	(1)	4
	(2)	1
	(3)	1
	(4)	1-2
Discharge ability 拔染性	Neutral 中性	1
	Alkaline 鹼性	1


吸盡固著曲線 Exhaustion & Fixation

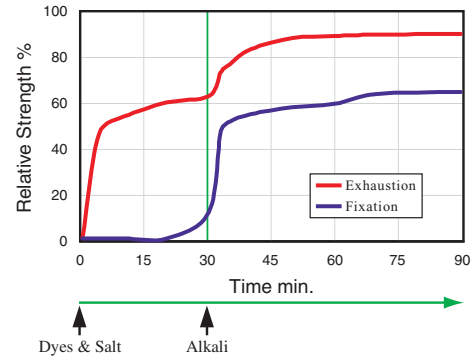

溫度依存性 Dependency on temperature

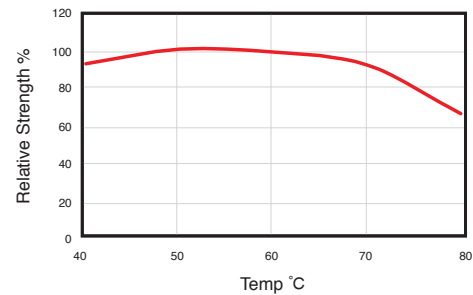

芒硝依存性 Dependency on Glauber's salt

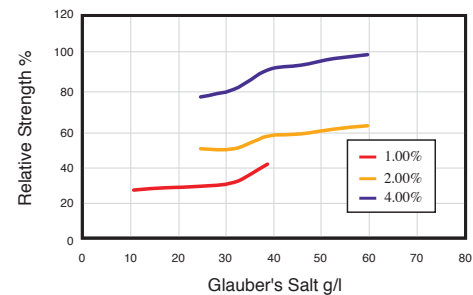

Everzol Dark Blue LF




Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Grade 級數	
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛					
Fastness	Washing 耐水洗	1.0%	4-5	5	5	5	5	5	5	5	Chlorinated Water耐氯水(20ppm)	1.0%	1-2	
	ISO C02		4-5	5	4-5	5	5	5	4-5	Peroxide Bleaching雙氧水漂白	1.0%	3-4		
	ISO C03		3	4-5	4-5	3	5	4-5	3	Rubbing 耐摩擦	Dry 乾	1.0%	5	
	ISO C04		4-5	5	4-5	5	5	5	4-5			Wet 濕	1.0%	3-4
	ISO C06-C1S		4-5	4-5	4	4-5	5	4	4	M&S C9A 擬溼日光 (detergent Light)	0.1%	4-5		
	ISO C06-C2S		4-5	5	4-5	5	5	5	5		1.0%	4-5		
M&S C4A	4-5	5	5	5	5	5	5	M&S C10A (UK-TO)	1.0%	3-4				
Water 耐水		1.0%	4-5	5	5	4-5	5	5	5	Saliva (DIN) 耐唾液	1.0%	4-5		
Hot Water 耐熱水		1.0%	4-5	5	3	3	4-5	5	4-5	Hot-Pressing 耐熱壓	Dry 乾	Immediately	1.0%	3-4R
Sea Water 耐海水		1.0%	4-5	5	5	5	5	5	5			4 Hours after	1.0%	5
Post mercerizing 後絲光		1.0%	4-5		4-5					Wet 濕	Immediately	1.0%	3-4R	
Acid hydrolysis 酸水解		1.0%	4-5	5	4-5	4-5	5	5	5			4 Hours after	1.0%	4-5
Perspiration 耐汗	Acid 酸	1.0%	4-5	5	4-5	4-5	5	5	5	Dry cleaning 耐乾洗	1.0%	4-5		
	Alkali 鹼		4-5	5	4-5	4-5	5	5	5					

Light Fastness 日光堅牢度

Evaluation		Dyeing Depth 染色濃度	Color Change 20 AFU	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20 AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光		0.1 %	3-4	5	Perspiration Light 耐汗日光	Acid Alkali	1.0 %	3-4	5
		0.3 %	4	5-6				2-3	4-5
		1.0 %	4-5	6					
		3.0 %	4-5	6					
		6.0 %	*	*					

浴比依存性 Dependency on Liquor ratio

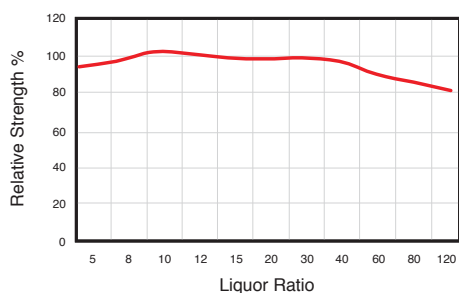

鹼依存性 Dependency on alkali

