



## Dyeing Properties 特性

Characteristics		Evaluation
Reactivity 反應性		II
Substantivity 親和性		A
Migration 移染性		4-5
Washing off 洗淨性		3-4
Solubility g/l 溶解度	50°C Water	100
	50°C Water+50 g/l Salt	100
High temp. Dyeing 高溫染色性	Dyed fabric 色布	2-3
	Dye Liquor 染浴	2-3
Color constancy 色恆性	Tungsten Lamp	1-2 R
	TL 84 Lamp	2 R
Metallic ions 金屬離子	Fe <sup>++</sup> 鐵	4-5
	Cu <sup>++</sup> 銅	3 G
Resin finishing 樹脂加工	Melamine 三聚氰胺	4-5
	Glyoxal 乙二醛	5
Shade change after fixing treatment 固色後變色性	Polyamide 聚乙醯胺	4-5
	Quaternary ammonium salt 四級胺鹽	5
Stripping 脫色性	(1)	1
	(2)	2
	(3)	2-3
	(4)	2
Discharge ability 拔染性	Neutral 中性	4
	Alkaline 鹼性	4


吸盡固著曲線 Exhaustion & Fixation

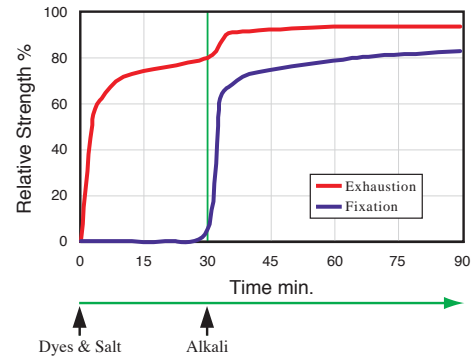

溫度依存性 Dependency on temperature

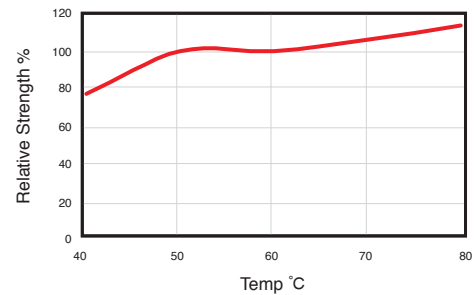

芒硝依存性 Dependency on Glauber's salt

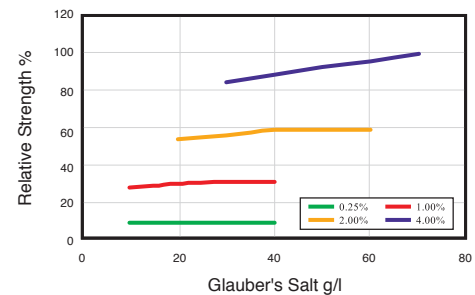

# Everzol Navy LX




## Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Grade 級數	
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛					
Washing 耐水洗	ISO C02	3.0%	5	5	4-5	5	5	5	5	5	Chlorinated Water耐氯水(20ppm)	3.0%	4-5	
	ISO C03		4-5	5	4-5	5	5	5	5	5	Peroxide Bleaching雙氧水漂白	3.0%	4-5	
	ISO C04		5	5	4	5	5	5	4	Rubbing 耐摩擦	Dry 乾	3.0%	5	
	ISO C06-C1S		4-5	5	4-5	5	5	5	5		Wet 濕		2-3	
	ISO C06-C2S		4-5	5	5	5	5	5	5	M&S C9A 擬溼日光 (detergent Light)		0.3%	>4-5	
	M&S C4A		4-5	5	5	5	5	5	5			3.0%	>4-5	
Water 耐水		3.0%	5	5	4-5	4-5	5	5	4	M&S C10A (UK-TO)		3.0%	4-5	
Hot Water 耐熱水		3.0%	5	5	5	5	5	5	5	Saliva (DIN) 耐唾液		3.0%	4-5	
Sea Water 耐海水		3.0%	5	5	4	5	5	5	5	Hot- Pressing 耐熱壓	Dry 乾	Immediately	3.0%	4-5
Post mercerizing 後絲光		3.0%	2-3R		4						4 Hours after	5		
Acid hydrolysis 酸水解		3.0%	4-5	5	4-5	4-5	5	5	4-5		Wet 濕	Immediately	3.0%	4-5
Perspiration 耐汗	Acid 酸	3.0%	5	5	4-5	4-5	5	5	5	Dry cleaning 耐乾洗	4 Hours after		3.0%	4-5
	Alkali 鹼		5	5	4-5	4-5	5	5	5		3.0%	4-5		

## Light Fastness 日光堅牢度

Evaluation		Dyeing Depth 染色濃度	Color Change 20 AFU	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20 AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	0.1 %		2-3	3-4	Perspiration Light 耐汗日光	Acid Alkali	3.0 %	2	5-6
	0.3 %		3	3-4				2	3-4
	1.0 %		3-4	4					
	3.0 %		4	4-5					
	6.0 %		4-5	5					

浴比依存性 Dependency on Liquor ratio

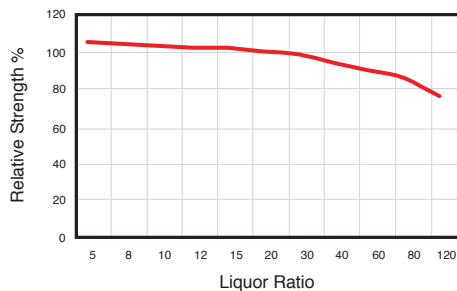

鹼依存性 Dependency on alkali

