



特性 Properties

溶解度 Solubility	90°C	50G/L
	90°C→25°C	20G/L
顏色濃度 Color consistency	鎢絲燈 Tungsten Lamp	較藍味,較鈍 bluer,duller
	TL84 白日光燈 TL 84 Lamp	較藍味,較鈍 bluer,duller
金屬離子的影響 Effect of metal In dyebath	鐵 Iron	4-5
	銅 Copper	4-5
	鉻 Chrome	4
半尼龍混紡之污染性 Staining on half nylon blends	醋酸纖維 Acetate	5
	棉 Cotton	3
	聚酯 Polyester	4-5
	壓克力 Acrylic	5
拔染性 Dischargeability	氯化亞錫 Stannous chloride	1
	Decrolin	2
剝色性 Decolouration	2	


試驗項目 Test item		固色前 Before fixing			固色後 After fixing		
		N	PA	Co	N	PA	Co
水洗堅牢度 Washing	AATCC 2A	4	3	4-5	5	5	5
	ISO 105-C02	4	3	4-5	5	4-5	5
	ISO 105-C03	3-4	2-3	4-5	4-5	4	4-5
	ISO C06-B2S	4	3-4	4-5	4-5	4	5
	ISO C06-C2S	4	2	4	4-5	3-4	4-5
耐水堅牢度 Water	ISO-E01	4	2	5	4	5	5
耐海水堅牢度 Sea water	ISO-E02	3Y	1-2	4	3Y	5	4-5
耐汗堅牢度 Perspiration ISO-E04	酸 acid	3-4	2-3	4-5	3-4	5	5
	鹼 alkaline	3	1-2	2-3	3-4	5	5
耐氯水堅牢度 Chlorinated water ISO-E03	20 ppm	4			4		
	100ppm	1			1		
磨擦堅牢度 Rubbing ISO-X12	乾 Dry	5			5		
	溼 Wet	5			5		
熱壓堅牢度 Hot pressing ISO-X11	立即 Immed.	4-5					
	4 小時後 After 4hr	5					
日光堅牢度 Light	ISO-B02	0.1% o.w.f	0.5% o.w.f	1% o.w.f.	2% o.w.f.		
		6	6	>6	>6		




0.1%



0.5%



1.0%




2.0%

以 MESITOL NBS 2% 固色後 (After fixed with MESITOL NBS 2%)


Everacid Green N-G

(C.I. Acid-Green 25)

昇溫上色曲線
Step dyeing

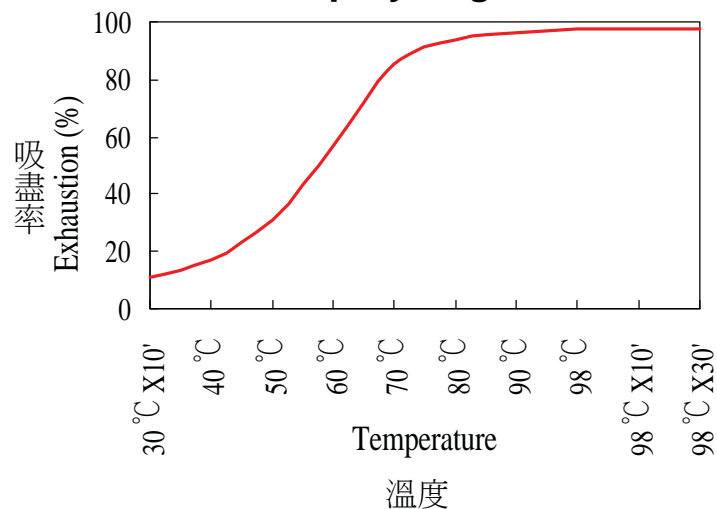

PH 依存性
Dependency on pH

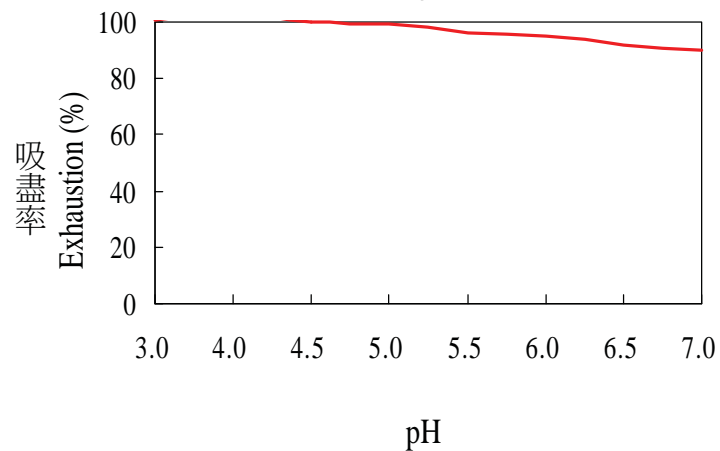

- ◇ 明亮帶藍味綠色
Bright bluish green
- ◇ 均染性佳
Good levelling property
- ◇ 甚至淺色也有極佳日光堅牢度
Excellent light fastness even in pale shades

染色特性 Dyeing properties

瞬染性 Strike	中 medium
移染性 Migration	極佳 very good
橫條遮蓋性 Coverage of barre	佳 good
尼龍和羊毛相對染料分配性 Relative dye distribution between polyamide and wool fiber	尼龍>羊毛 PA>Wool
羊毛的色光與尼龍比較 Shade on wool as compared with polyamide	較紅味 redder